



Заклепка распорная усиленная
Тип SS-AFix
Стандартный борт
Углеродистая сталь / Углеродистая сталь

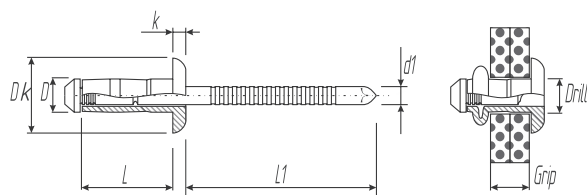

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	Drill, мм	Grip, мм	H	H	Артикул
3,2	7,0	6,8	1,4	2,1	3,3	1,0-3,0	1200	1300	SS-Afix 32070
	9,0					3,0-5,0	1700	1300	SS-Afix 32090
	11,5					5,0-7,0	2500	1300	SS-Afix 32115
4,0	8,0	8,0	1,5	2,6	4,1	1,0-3,0	2400	2800	SS-Afix 40080
	10,0					3,0-5,0	3500	2800	SS-Afix 40100
	12,5					5,0-7,0	4100	2800	SS-Afix 40125
4,8	9,5	9,6	1,5	3,0	4,9	1,5-3,5	3600	2900	SS-Afix 48095
	12,0					3,5-6,0	4200	2900	SS-Afix 48120
	12,5					3,5-6,0	4200	2900	SS-Afix 48125
	14,5					6,0-8,0	5200	2900	SS-Afix 48145
	15,0					6,0-8,5	5600	2900	SS-Afix 48150

Заклепка распорная усиленная
Тип BB-AFix
Стандартный борт
Нержавеющая сталь / Нержавеющая сталь

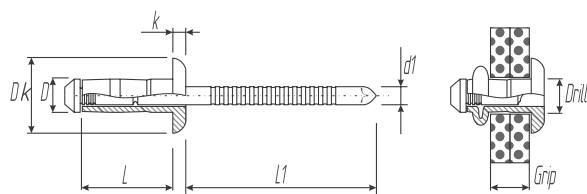

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	Drill, мм	Grip, мм	H	H	Артикул
3,2	6,5	6,6	1,2	2,15	3,3	1,0-3,0	1600	1600	BB-Afix 32065
	8,0					2,0-4,0	2000	1600	BB-Afix 32080
	9,2					3,0-5,0	2000	1600	BB-Afix 32092
	11,5					5,0-7,0	2000	1600	BB-Afix 32115
4,0	7,5	8,0	1,5	2,6	4,1	1,0-3,0	2800	4000	BB-Afix 40075
	9,5					3,0-5,0	5200	4000	BB-Afix 40095
	12,5					5,0-7,0	5200	4000	BB-Afix 40125
	14,0					5,0-8,0	5200	4000	BB-Afix 40140
	15,0					8,0-10,0	5200	4000	BB-Afix 40150
	16,0					9,0-11,0	5200	4000	BB-Afix 40160
4,8	10,0	10,0	1,7	3,25	4,9	1,5-3,5	4200	5000	BB-Afix 48100
	12,0					3,5-6,0	5500	5000	BB-Afix 48120
	14,3					6,0-8,5	5500	5000	BB-Afix 48143
	16,0					7,0-10,0	5500	5000	BB-Afix 48160
	18,5					10,5-13,0	5500	5000	BB-Afix 48185
	20,0					11,5-14,0	5500	5000	BB-Afix 48200
6,0	25,0	12,6	2,2	4,2	6,1	16,5-20,0	5500	5000	BB-Afix 48250
	10,0					1,5-4,0	7800	6200	BB-Afix 60100
	13,0					3,0-6,0	9500	6200	BB-Afix 60130
	16,0					6,0-9,0	9500	6200	BB-Afix 60160
6,4	19,0	13,4	3,3	4,2	6,5	9,0-12,0	9500	6200	BB-Afix 60190
	13,0					1,5-5,0	10500	8000	BB-Afix 64130
	16,5					5,0-8,5	13700	8000	BB-Afix 64165