


## Заклепка открытого типа

Тип **1-AS**

Стандартный борт

Алюминиевый сплав (AlMg 1,5) / Углеродистая сталь

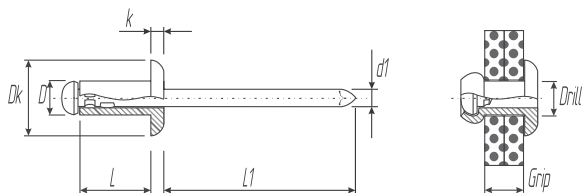


D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
2,4	4,0	5,0 +0/-0,8	1,0	1,6	25	2,5	0,5-2,0	175	260	1-AS 2404
	6,0						2,0-4,0			1-AS 2406
	8,0						4,0-6,0			1-AS 2408
	10,0						6,0-8,0			1-AS 2410
	12,0						8,0-10,0			1-AS 2412
3,0	6,0	6,3 +0/-0,9	1,3	2,0	25	3,1	1,0-3,5	295	375	1-AS 3006
	8,0						3,5-5,5			1-AS 3008
	10,0						5,5-7,0			1-AS 3010
	12,0						7,0-9,0			1-AS 3012
	14,0						9,0-11,0			1-AS 3014
	16,0						11,0-13,0			1-AS 3016
	18,0						13,0-15,0			1-AS 3018
20,0	15,0-17,0	1-AS 3020								
3,2	6,0	6,5 +0,2/-0,7	1,3	2,0	25	3,3	1,0-3,5	360	450	1-AS 3206
	8,0						3,5-5,5			1-AS 3208
	10,0						5,5-7,0			1-AS 3210
	12,0						7,0-9,0			1-AS 3212
	13,0						8,0-10,0			1-AS 3213
	14,0						9,0-11,0			1-AS 3214
	16,0						11,0-13,0			1-AS 3216
	18,0						13,0-15,0			1-AS 3218
	19,0						12,0-16,0			1-AS 3219
	20,0						15,0-17,0			1-AS 3220
	21,0						16,0-18,0			1-AS 3221
25,0	17,0-22,0	1-AS 3225								
4,0	6,0	8,0 +0,4/-1,1	1,7	2,5	27	4,1	1,0-3,0	540	750	1-AS 4006
	8,0						3,0-5,0			1-AS 4008
	10,0						5,0-6,5			1-AS 4010
	12,0						6,5-8,5			1-AS 4012
	14,0						8,5-10,5			1-AS 4014
	16,0						10,5-12,5			1-AS 4016
	18,0						12,5-14,5			1-AS 4018
	20,0						14,5-16,5			1-AS 4020
	25,0						16,5-21,5			1-AS 4025
	30,0						21,5-26,0			1-AS 4030
	35,0						26,0-30,0			1-AS 4035
4,8	6,0	9,5 +0,6/-1,2	2,0	2,7	27	4,9	1,5-2,5	935	1050	1-AS 4806
	8,0						2,5-4,0			1-AS 4808
	10,0						4,0-6,0			1-AS 4810
	12,0						6,0-8,0			1-AS 4812
	14,0						8,0-10,0			1-AS 4814
	16,0						10,0-12,0			1-AS 4816
	18,0						12,0-14,0			1-AS 4818
	20,0						14,0-16,0			1-AS 4820
	25,0						16,0-21,0			1-AS 4825
	30,0						21,0-25,0			1-AS 4830
	35,0						25,0-30,0			1-AS 4835
40,0	30,0-35,0	1-AS 4840								
50,0	39,0-44,0	1-AS 4850								

## Заклепка открытого типа

Тип **1-AS**

Стандартный борт

Алюминиевый сплав (AlMg 1,5) / Углеродистая сталь

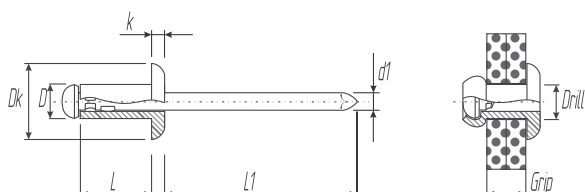


D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
5,0	6,0	10,0 +0,5/-1,3	2,1	3,0	27	5,1	1,5-2,5	1100	1175	1-AS 5006
	8,0						2,5-4,5			1-AS 5008
	10,0						4,5-6,0			1-AS 5010
	12,0						6,0-8,0			1-AS 5012
	14,0						8,0-10,0			1-AS 5014
	16,0						10,0-12,0			1-AS 5016
	18,0						12,0-14,0			1-AS 5018
	20,0						14,0-16,0			1-AS 5020
	25,0						16,0-20,0			1-AS 5025
	30,0						20,0-25,0			1-AS 5030
	35,0						25,0-30,0			1-AS 5035
40,0	30,0-35,0	1-AS 5040								
50,0	39,0-44,0	1-AS 5050								
6,0	8,0	12,0 +0,6/-1,2	2,5	3,4	27	6,1	2,0-3,0	1350	1940	1-AS 6008
	10,0						3,0-5,0			1-AS 6010
	12,0						5,0-7,0			1-AS 6012
	14,0						7,0-9,0			1-AS 6014
	15,0						8,0-10,0			1-AS 6015
	16,0						9,0-11,0			1-AS 6016
	18,0						11,0-13,0			1-AS 6018
	20,0						13,0-15,0			1-AS 6020
	25,0						15,0-20,0			1-AS 6025
	30,0						20,0-25,0			1-AS 6030
6,4	10,0	13,0 +0,4/-1,4	2,7	3,9	27	6,5	3,0-4,0	1460	2050	1-AS 6410
	12,0						4,0-6,0			1-AS 6412
	14,0						6,0-8,0			1-AS 6414
	15,0						7,0-9,0			1-AS 6415
	16,0						8,0-10,0			1-AS 6416
	18,0						10,0-12,0			1-AS 6418
	20,0						12,0-14,0			1-AS 6420
	22,0						13,0-16,0			1-AS 6422
	25,0						14,0-18,0			1-AS 6425
	28,0						16,0-21,0			1-AS 6428
	30,0						18,0-23,0			1-AS 6430
	32,0						20,0-25,0			1-AS 6432
	35,0						23,0-28,0			1-AS 6435
	40,0						28,0-33,0			1-AS 6440
45,0	33,0-38,0	1-AS 6445								
50,0	37,5-42,5	1-AS 6450								
55,0	42,5-47,5	1-AS 6455								
60,0	48,0-53,0	1-AS 6460								

## Заклепка открытого типа

Тип **2-AS**

Стандартный борт

Алюминиевый сплав (AlMg 2,5) / Углеродистая сталь

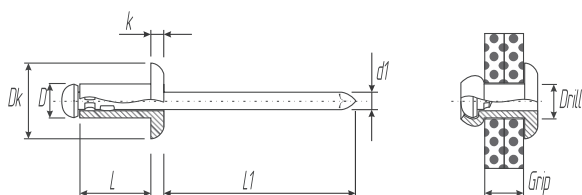


D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
2,4	4,0	5,0 +0/-0,8	1,0	1,6	25	2,5	0,5-2,0	310	360	2-AS 2404
	6,0						2,0-4,0			2-AS 2406
	8,0						4,0-6,0			2-AS 2408
	10,0						6,0-8,0			2-AS 2410
	12,0						8,0-10,0			2-AS 2412
3,0	6,0	6,3 +0/-0,9	1,3	2,0	25	3,1	1,0-3,5	500	530	2-AS 3006
	8,0						3,5-5,5			2-AS 3008
	10,0						5,5-7,0			2-AS 3010
	12,0						7,0-9,0			2-AS 3012
	14,0						9,0-11,0			2-AS 3014
	16,0						11,0-13,0			2-AS 3016
	18,0						13,0-15,0			2-AS 3018
20,0	15,0-17,0	2-AS 3020								
3,2	6,0	6,7 +0/-0,9	1,3	2,0	25	3,3	1,0-3,5	600	670	2-AS 3206
	8,0						3,5-5,5			2-AS 3208
	10,0						5,5-7,0			2-AS 3210
	12,0						7,0-9,0			2-AS 3212
	13,0						8,0-10,0			2-AS 3213
	14,0						9,0-11,0			2-AS 3214
	16,0						11,0-13,0			2-AS 3216
	18,0						13,0-15,0			2-AS 3218
	19,0						12,0-16,0			2-AS 3219
	20,0						15,0-17,0			2-AS 3220
	21,0						16,0-18,0			2-AS 3221
25,0	17,0-22,0	2-AS 3225								
4,0	6,0	8,0 +0,4/-1,1	1,7	2,5	27	4,1	1,0-3,0	850	1020	2-AS 4006
	8,0						3,0-5,0			2-AS 4008
	10,0						5,0-6,5			2-AS 4010
	12,0						6,5-8,5			2-AS 4012
	14,0						8,5-10,5			2-AS 4014
	16,0						10,5-12,5			2-AS 4016
	18,0						12,5-14,5			2-AS 4018
	20,0						14,5-16,5			2-AS 4020
	25,0						16,5-21,5			2-AS 4025
	30,0						21,5-26,0			2-AS 4030
35,0	26,0-30,0	2-AS 4035								
4,8	6,0	9,5 +0,6/-1,2	2,0	3,0	27	4,9	1,5-2,5	1250	1430	2-AS 4806
	8,0						2,5-4,0			2-AS 4808
	10,0						4,0-6,0			2-AS 4810
	12,0						6,0-8,0			2-AS 4812
	14,0						8,0-10,0			2-AS 4814
	16,0						10,0-12,0			2-AS 4816
	18,0						12,0-14,0			2-AS 4818
	20,0						14,0-16,0			2-AS 4820
	21,0						13,0-17,0			2-AS 4821
24,0	15,0-19,0	2-AS 4824								

## Заклепка открытого типа

Тип **2-AS**

Стандартный борт

Алюминиевый сплав (AlMg 2,5) / Углеродистая сталь

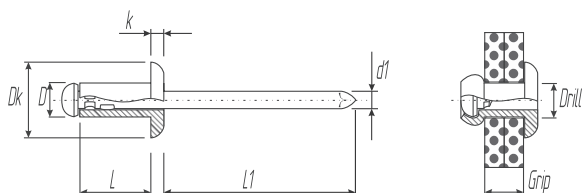


D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
4,8	25,0	9,5 +0,6/-1,2	2,0	3,0	25	4,9	16,0-21,0	1250	1430	2-AS 4825
	28,0						20,0-23,0			2-AS 4828
	30,0						21,0-25,0			2-AS 4830
	35,0						25,0-30,0			2-AS 4835
	40,0						30,0-35,0			2-AS 4840
	50,0						39,0-44,0			2-AS 4850
5,0	6,0	10,0 +0,5/-1,3	2,1	3,0	27	5,1	1,5-2,5	1400	2000	2-AS 5006
	8,0						2,5-4,5			2-AS 5008
	10,0						4,5-6,0			2-AS 5010
	12,0						6,0-8,0			2-AS 5012
	14,0						8,0-10,0			2-AS 5014
	16,0						10,0-12,0			2-AS 5016
	18,0						12,0-14,0			2-AS 5018
	20,0						14,0-16,0			2-AS 5020
	25,0						16,0-20,0			2-AS 5025
	30,0						20,0-25,0			2-AS 5030
	35,0						25,0-30,0			2-AS 5035
40,0	30,0-35,0	2-AS 5040								
50,0	39,0-44,0	2-AS 5050								
6,0	8,0	12,0 +0,6/-1,2	2,5	3,4	27	6,1	2,0-3,0	2400	3000	2-AS 6008
	10,0						3,0-5,0			2-AS 6010
	12,0						5,0-7,0			2-AS 6012
	14,0						7,0-9,0			2-AS 6014
	15,0						8,0-10,0			2-AS 6015
	16,0						9,0-11,0			2-AS 6016
	18,0						11,0-13,0			2-AS 6018
	20,0						13,0-15,0			2-AS 6020
	25,0						15,0-20,0			2-AS 6025
	30,0						20,0-25,0			2-AS 6030
6,4	10,0	13,0 +0,4/-1,4	2,7	3,9	27	6,5	3,0-4,0	2700	3150	2-AS 6410
	12,0						4,0-6,0			2-AS 6412
	14,0						6,0-8,0			2-AS 6414
	15,0						7,0-9,0			2-AS 6415
	16,0						8,0-10,0			2-AS 6416
	18,0						10,0-12,0			2-AS 6418
	20,0						12,0-14,0			2-AS 6420
	22,0						13,0-16,0			2-AS 6422
	25,0						14,0-18,0			2-AS 6425
	28,0						16,0-21,0			2-AS 6428
	30,0						18,0-23,0			2-AS 6430
	32,0						20,0-25,0			2-AS 6432
	35,0						23,0-28,0			2-AS 6435
	40,0						28,0-33,0			2-AS 6440
	45,0						33,0-38,0			2-AS 6445
50,0	37,5-42,5	2-AS 6450								
55,0	42,5-47,5	2-AS 6455								
60,0	48,0-53,0	2-AS 6460								

## Заклепка открытого типа

Тип **3-AS**

Стандартный борт

Алюминиевый сплав (AlMg 3,5) / Углеродистая сталь

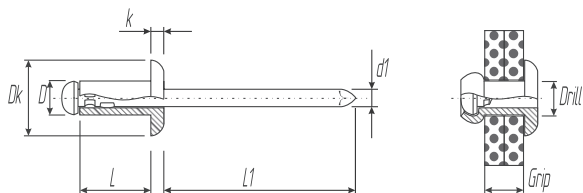


D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
2,4	4,0	5,0 +0/-0,8	1,0	1,6	25	2,5	0,5-2,0	580	700	3-AS 2404
	6,0						2,0-4,0			3-AS 2406
	8,0						4,0-6,0			3-AS 2408
	10,0						6,0-8,0			3-AS 2410
	12,0						8,0-10,0			3-AS 2412
3,0	6,0	6,3 +0/-0,9	1,3	2,0	25	3,1	1,0-3,5	790	1020	3-AS 3006
	8,0						3,5-5,5			3-AS 3008
	10,0						5,5-7,0			3-AS 3010
	12,0						7,0-9,0			3-AS 3012
	14,0						9,0-11,0			3-AS 3014
	16,0						11,0-13,0			3-AS 3016
	18,0						13,0-15,0			3-AS 3018
20,0	15,0-17,0	3-AS 3020								
3,2	6,0	6,7 +0/-0,9	1,3	2,0	25	3,3	1,0-3,5	880	1150	3-AS 3206
	8,0						3,5-5,5			3-AS 3208
	10,0						5,5-7,0			3-AS 3210
	12,0						7,0-9,0			3-AS 3212
	14,0						9,0-11,0			3-AS 3214
	16,0						11,0-13,0			3-AS 3216
	18,0						13,0-15,0			3-AS 3218
	20,0						15,0-17,0			3-AS 3220
	25,0						17,0-22,0			3-AS 3225
4,0	6,0	8,0 +0,4/-1,1	1,7	2,5	27	4,1	1,0-3,0	1390	2060	3-AS 4006
	8,0						3,0-5,0			3-AS 4008
	10,0						5,0-6,5			3-AS 4010
	12,0						6,5-8,5			3-AS 4012
	14,0						8,5-10,5			3-AS 4014
	16,0						10,5-12,5			3-AS 4016
	18,0						12,5-14,5			3-AS 4018
	20,0						14,5-16,5			3-AS 4020
	25,0						16,5-21,5			3-AS 4025
	30,0						21,5-26,0			3-AS 4030
	35,0						26,0-30,0			3-AS 4035
4,8	6,0	9,5 +0,6/-1,2	2,0	3,0	27	4,9	1,5-2,5	1870	2800	3-AS 4806
	8,0						2,5-4,0			3-AS 4808
	10,0						4,0-6,0			3-AS 4810
	12,0						6,0-8,0			3-AS 4812
	14,0						8,0-10,0			3-AS 4814
	16,0						10,0-12,0			3-AS 4816
	18,0						12,0-14,0			3-AS 4818
	20,0						14,0-16,0			3-AS 4820
	25,0						16,0-21,0			3-AS 4825
	30,0						21,0-25,0			3-AS 4830
	35,0						25,0-30,0			3-AS 4835
	40,0						30,0-35,0			3-AS 4840
	50,0						39,0-44,0			3-AS 4850

## Заклепка открытого типа

Тип **3-AS**

Стандартный борт

Алюминиевый сплав (AlMg 3,5) / Углеродистая сталь

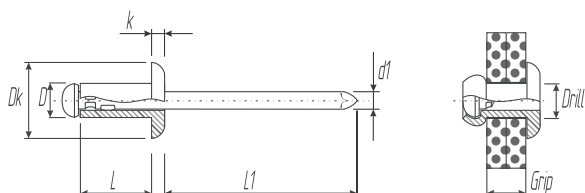

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
5,0	6,0	10,0 +0,5/-1,3	2,1	3,0	27	5,1	1,5-2,5	2245	3690	3-AS 5006
	8,0						2,5-4,5			3-AS 5008
	10,0						4,5-6,0			3-AS 5010
	12,0						6,0-8,0			3-AS 5012
	14,0						8,0-10,0			3-AS 5014
	16,0						10,0-12,0			3-AS 5016
	18,0						12,0-14,0			3-AS 5018
	20,0						14,0-16,0			3-AS 5020
	25,0						16,0-20,0			3-AS 5025
	30,0						20,0-25,0			3-AS 5030
	35,0						25,0-30,0			3-AS 5035
40,0	30,0-35,0	3-AS 5040								
50,0	39,0-44,0	3-AS 5050								
6,0	8,0	12,0 +0,6/-1,2	2,5	3,4	27	6,1	2,0-3,0	3500	4600	3-AS 6008
	10,0						3,0-5,0			3-AS 6010
	12,0						5,0-7,0			3-AS 6012
	14,0						7,0-9,0			3-AS 6014
	15,0						8,0-10,0			3-AS 6015
	16,0						9,0-11,0			3-AS 6016
	18,0						11,0-13,0			3-AS 6018
	20,0						13,0-15,0			3-AS 6020
	25,0						15,0-20,0			3-AS 6025
	30,0						20,0-25,0			3-AS 6030
	6,4						10,0			13,0 +0,4/-1,4
12,0		4,0-6,0	3-AS 6412							
14,0		6,0-8,0	3-AS 6414							
15,0		7,0-9,0	3-AS 6415							
16,0		8,0-10,0	3-AS 6416							
18,0		10,0-12,0	3-AS 6418							
20,0		12,0-14,0	3-AS 6420							
22,0		13,0-16,0	3-AS 6422							
25,0		14,0-18,0	3-AS 6425							
28,0		16,0-21,0	3-AS 6428							
30,0		18,0-23,0	3-AS 6430							
32,0		20,0-25,0	3-AS 6432							
35,0		23,0-28,0	3-AS 6435							
40,0		28,0-33,0	3-AS 6440							
45,0		33,0-38,0	3-AS 6445							
50,0	37,5-42,5	3-AS 6450								
55,0	42,5-47,5	3-AS 6455								
60,0	48,0-53,0	3-AS 6460								