



Заклепка открытого типа
Тип ВВ
Стандартный борт
Нержавеющая сталь / Нержавеющая сталь

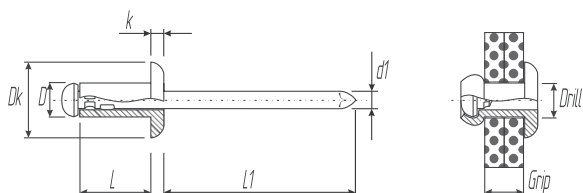

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
2,4	6,0	5,0 +0/-0,7	1,0	1,6	25	2,5	0,5-3,5	1200	1400	BB 2406
	8,0						3,5-5,5			BB 2408
	10,0						5,5-7,5			BB 2410
	12,0						7,0-9,5			BB 2412
3,0	6,0	6,0 +0,3/-0,6	1,3	2,1	25	3,1	1,0-3,0	1800	2200	BB 3006
	8,0						3,0-5,0			BB 3008
	10,0						5,0-7,0			BB 3010
	12,0						7,0-9,0			BB 3012
	14,0						9,0-12,0			BB 3015
16,0	10,0-13,0	BB 3016								
3,2	6,0	6,4 +0,3/-0,6	1,3	2,2	25	3,3	1,0-3,0	1900	2500	BB 3206
	8,0						3,0-5,0			BB 3208
	10,0						5,0-7,0			BB 3210
	12,0						7,0-9,0			BB 3212
	15,0						9,0-11,0			BB 3214
16,0	11,0-13,0	BB 3216								
4,0	6,0	8,0 +0,4/-1,1	1,7	2,8	27	4,1	1,0-2,5	2900	3650	BB 4006
	8,0						2,5-4,5			BB 4008
	10,0						4,5-6,5			BB 4010
	12,0						6,5-8,5			BB 4012
	14,0						8,5-10,0			BB 4014
	16,0						10,0-12,0			BB 4016
	18,0						12,0-14,0			BB 4018
20,0	14,0-16,0	BB 4020								
25,0	16,0-21,0	BB 4025								
4,8	6,0	9,5 +0,6/-1,2	2,0	3,2	27	4,9	1,0-2,5	4230	5340	BB 4806
	8,0						1,5-4,0			BB 4808
	10,0						4,0-6,0			BB 4810
	12,0						6,0-8,0			BB 4812
	14,0						8,0-9,5			BB 4814
	16,0						9,5-11,0			BB 4816
	18,0						11,0-13,0			BB 4818
	20,0						13,0-16,0			BB 4820
	22,0						15,0-17,0			BB 4822
	25,0						17,0-20,0			BB 4825
	30,0						20,0-25,0			BB 4830
35,0	25,0-30,0	BB 4835								
40,0	30,0-35,0	BB 4840								
5,0	8,0	10,0 +0,5/-1,3	2,1	3,3	27	5,1	1,5-4,0	4700	5800	BB 5008
	10,0						4,0-6,0			BB 5010
	12,0						6,0-8,0			BB 5012
	14,0						8,0-9,5			BB 5014
	16,0						9,5-11,0			BB 5016
	18,0						11,0-13,0			BB 5018
	20,0						13,0-16,0			BB 5020
	25,0						16,0-20,0			BB 5025
30,0	20,0-25,0	BB 5030								

Заклепка открытого типа
Тип BB
Стандартный борт
Нержавеющая сталь / Нержавеющая сталь

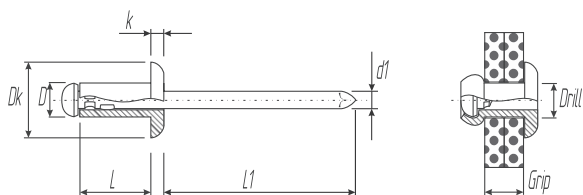

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
6,0	8,0	12,0 +0/-1,5	2,3	3,9	31	6,1	1,5-3,0	5700	7500	BB 6008
	10,0						3,0-4,0			BB 6010
	12,0						4,0-6,0			BB 6012
	14,0						6,0-8,0			BB 6014
	15,0						6,0-9,0			BB 6015
	16,0						6,0-10,0			BB 6016
	18,0						9,0-12,0			BB 6018
	20,0						10,0-14,0			BB 6020
	25,0						14,0-19,0			BB 6025
	30,0						19,0-24,0			BB 6030
6,4	10,0	13,0 +0/-1,5	2,5	3,9	31	6,5	2,0-4,0	7570	9350	BB 6410
	12,0						4,0-6,0			BB 6412
	14,0						6,0-8,0			BB 6414
	15,0						6,0-9,0			BB 6415
	16,0						6,0-10,0			BB 6416
	18,0						9,0-12,0			BB 6418
	20,0						12,0-14,0			BB 6420
	25,0						14,0-19,0			BB 6425
	28,0						19,0-22,0			BB 6428
	30,0						22,0-24,0			BB 6430