


Заклепка открытого типа *
Тип CS
Стандартный борт
Медь / Углеродистая сталь

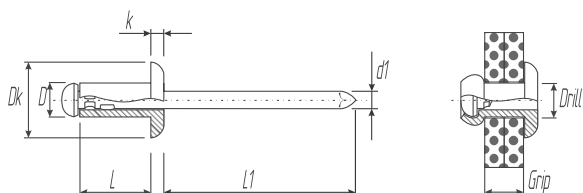

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
3,0	6,0	6,5 +0/-0,7	1,0	1,8	27	3,1	1,0-3,0	700	990	CS 3006
	8,0						3,0-5,0			CS 3008
	10,0						5,0-7,0			CS 3010
	12,0						7,0-9,0			CS 3012
3,2	6,0	6,5 +0/-0,7	1,0	1,8	27	3,3	1,0-3,0	800	1120	CS 3206
	8,0						3,0-5,0			CS 3208
	10,0						5,0-7,0			CS 3210
	12,0						7,0-9,0			CS 3212
4,0	6,0	8,0 +0/-1,0	1,3	2,2	27	4,1	1,0-2,5	1300	2000	CS 4006
	8,0						2,5-4,5			CS 4008
	10,0						4,5-6,5			CS 4010
	12,0						6,5-8,5			CS 4012
	14,0						8,5-10,0			CS 4014
16,0	10,0-12,5	CS 4016								
4,8	8,0	9,5 +0/-1,0	1,4	2,7	27	4,9	2,5-4,0	1900	2850	CS 4808
	10,0						4,0-6,0			CS 4810
	12,0						6,0-8,0			CS 4812
	14,0						8,0-10,0			CS 4814
	16,0						10,0-12,0			CS 4816
	18,0						12,0-14,0			CS 4818
20,0	14,0-16,0	CS 4820								

* Минимальную партию и сроки поставки уточняйте у вашего Технического консультанта.