


Заклепка открытого типа

Тип **SS LF**

Увеличенный борт

Углеродистая сталь / Углеродистая сталь

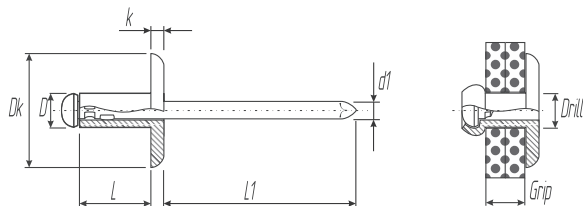

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
3,0	5,0	9,5 +0,5/-1,0	1,4	2,1	25	3,1	0,5-1,5	915	1125	SSLF 3005
	6,0						1,0-3,0			SSLF 3006
	8,0						3,0-5,0			SSLF 3008
	10,0						5,0-7,0			SSLF 3010
	12,0						7,0-9,0			SSLF 3012
	14,0						9,0-11,0			SSLF 3014
	16,0						11,0-13,0			SSLF 3016
	18,0						13,0-15,0			SSLF 3018
	20,0						15,0-17,0			SSLF 3020
	25,0						17,0-22,0			SSLF 3025
4,0	6,0	12,0 +0,5/-1,0	2,5	2,42	27	4,1	1,0-3,0	2030	2500	SSLF 4006
	8,0						3,0-5,0			SSLF 4008
	10,0						5,0-6,5			SSLF 4010
	12,0						6,5-8,5			SSLF 4012
	14,0						8,5-10,5			SSLF 4014
	16,0						10,5-12,5			SSLF 4016
	18,0						12,5-14,5			SSLF 4018
	20,0						14,5-16,5			SSLF 4020
	25,0						16,5-21,5			SSLF 4025
	4,8						8,0			14,0 +0,5/-1,0
10,0		4,0-6,0	SSLF 4810							
12,0		6,0-8,0	SSLF 4812							
14,0		8,0-10,0	SSLF 4814							
16,0		10,0-12,0	SSLF 4816							
18,0		12,0-14,0	SSLF 4818							
20,0		14,0-16,0	SSLF 4820							
21,0		15,0-17,0	SSLF 4821							
22,0		16,0-18,0	SSLF 4822							
24,0		18,0-20,0	SSLF 4824							
25,0		16,0-21,0	SSLF 4825							
30,0		21,0-25,0	SSLF 4830							
35,0		25,0-30,0	SSLF 4835							
5,0	8,0	14,0 +0,5/-1,0	2,5	2,92	27	5,1	2,5-4,0	3500	4800	SSLF 5008
	10,0						4,0-6,0			SSLF 5010
	12,0						6,0-8,0			SSLF 5012
	14,0						8,0-10,0			SSLF 5014
	16,0						10,0-12,0			SSLF 5016
	18,0						12,0-14,0			SSLF 5018
	20,0						14,0-16,0			SSLF 5020
	25,0						16,0-21,0			SSLF 5025
	30,0						21,0-25,0			SSLF 5030

Возможен заказ заклепок Ø4,8 и 5,0 с увеличенным бортиком Ø16 мм