


Заклепка закрытого типа

Тип **5-ASF**

Стандартный борт

Алюминиевый сплав (AlMg 5,0) / Углеродистая сталь

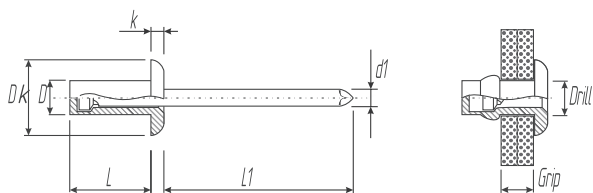

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H		Артикул
								H	H	
3,2	6,5	6,5 +0,2/-0,7	1,3	1,85	25	3,3	0,5-2,0	1100	1450	5-ASF 32065
	8,0						2,0-3,5			5-ASF 32080
	9,5						3,5-5,0			5-ASF 32095
	11,0						5,0-6,5			5-ASF 32110
	12,5						6,5-8,0			5-ASF 32125
4,0	8,0	8,0 +0,4/-1,1	1,7	2,35	27	4,1	0,5-3,5	1600	2200	5-ASF 40080
	9,5						3,5-5,0			5-ASF 40095
	10,0						4,0-5,5			5-ASF 40100
	11,0						5,0-6,5			5-ASF 40110
	12,5						6,5-8,0			5-ASF 40125
4,8	15,0	9,5 +0,6/-1,2	2,0	2,77	27	4,9	8,0-10,5	2200	3100	5-ASF 40150
	8,0						1,0-3,0			5-ASF 48080
	9,5						3,0-5,0			5-ASF 48095
	10,0						3,5-5,5			5-ASF 48100
	11,0						5,0-6,5			5-ASF 48110
	12,5						6,0-7,5			5-ASF 48125
	13,0						6,5-8,0			5-ASF 48130
	14,0						7,5-9,0			5-ASF 48140
	14,5						8,0-9,5			5-ASF 48145
	16,0						9,5-11,0			5-ASF 48160
6,4	18,0	12,8 +0,6/-1,2	2,7	3,71	27	6,5	11,0-13,0	3600	4900	5-ASF 48180
	21,0						13,0-16,0			5-ASF 48210
	25,0						16,0-20,0			5-ASF 48250
	12,5						1,5-6,0			5-ASF 64125
	14,0						5,0-7,5			5-ASF 64140
	16,0						6,0-8,5			5-ASF 64160
	18,0						8,5-10,5			5-ASF 64180
20,0	10,5-12,5	5-ASF 64200								
25,0	12,5-17,5	5-ASF 64250								