


Заклепка закрытого типа

Тип **5-ASF C**

Потайной борт

Алюминиевый сплав (AlMg 5,0) / Углеродистая сталь

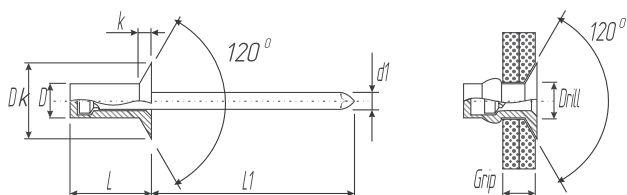

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
3,2	8,0	6,5 +0,2/-0,7	1,3	1,85	25	3,3	2,0-3,5	1100	1450	5-ASFC 32080
	9,5						3,5-5,0			5-ASFC 32095
	11,0						5,0-6,5			5-ASFC 32110
	12,0						6,5-8,0			5-ASFC 32120
	13,5						8,0-9,0			5-ASFC 32135
4,0	8,0	8,0 +0,4/-1,1	1,7	2,35	27	4,1	0,5-3,5	1600	2200	5-ASFC 40080
	9,5						2,5-4,5			5-ASFC 40095
	11,0						4,5-6,5			5-ASFC 40110
	12,5						6,5-8,0			5-ASFC 40125
	14,5						8,0-10,0			5-ASFC 40145
4,8	9,5	9,5 +0,6/-1,2	2,0	2,77	27	4,9	3,0-4,5	2200	3100	5-ASFC 48095
	11,0						4,5-6,5			5-ASFC 48110
	12,0						5,5-7,0			5-ASFC 48120
	13,0						6,5-8,0			5-ASFC 48130
	14,5						8,0-9,5			5-ASFC 48145
	16,0						9,5-11,0			5-ASFC 48160
	18,0						11,0-13,0			5-ASFC 48180
21,0	13,0-16,0	5-ASFC 48210								