


Заклепка закрытого типа

Тип **BBF**

Стандартный борт

Нержавеющая сталь / Нержавеющая сталь

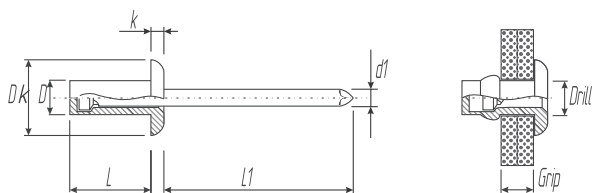

| D, мм +0,08/-0,15 | L, мм | Dk, мм | k, мм | d1, мм max | L1, мм min | Drill, мм | Grip, мм | H | H | Артикул |
|----------------------|-----------|------------------|-------|---------------|---------------|-----------|----------|------|------|-----------|
| 3,2 | 6,0 | 6,5 +0,2/-0,7 | 1,3 | 1,9 | 25 | 3,3 | 0,5-1,5 | 2300 | 2700 | BBF 32060 |
| | 8,0 | | | | | | 1,5-3,0 | | | BBF 32080 |
| | 9,5 | | | | | | 3,0-4,5 | | | BBF 32095 |
| | 12,0 | | | | | | 4,5-6,5 | | | BBF 32120 |
| | 14,0 | | | | | | 6,5-8,0 | | | BBF 32140 |
| 4,0 | 6,0 | 8,0 +0,4/-1,1 | 1,7 | 2,3 | 27 | 4,1 | 0,5-1,5 | 3500 | 4400 | BBF 40060 |
| | 8,0 | | | | | | 1,5-3,0 | | | BBF 40080 |
| | 9,5 | | | | | | 3,0-5,0 | | | BBF 40095 |
| | 10,0 | | | | | | 3,0-5,0 | | | BBF 40100 |
| | 12,0 | | | | | | 5,0-6,5 | | | BBF 40120 |
| | 14,0 | | | | | | 6,5-8,0 | | | BBF 40140 |
| 4,8 | 8,0 | 9,5 +0,6/-1,2 | 2,0 | 2,9 | 27 | 4,9 | 1,0-3,0 | 4900 | 5500 | BBF 48080 |
| | 9,5 | | | | | | 3,0-5,0 | | | BBF 48095 |
| | 10,0 | | | | | | 3,5-5,5 | | | BBF 48100 |
| | 12,0 | | | | | | 5,0-6,5 | | | BBF 48120 |
| | 14,0 | | | | | | 6,5-8,0 | | | BBF 48140 |
| | 16,0 | | | | | | 8,0-9,5 | | | BBF 48160 |
| | 18,0 | | | | | | 9,5-11,0 | | | BBF 48180 |
| 20,0 | 11,0-12,5 | BBF 48200 | | | | | | | | |