


Заклепка закрытого типа
 Тип **SSF**
 Стандартный борт
 Углеродистая сталь / Углеродистая сталь

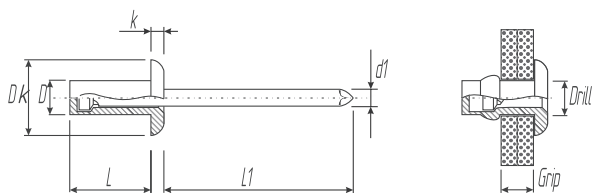

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
3,2	6,0	6,5 +0,2/-0,7	1,3	1,9	25	3,3	0,5-1,5	1150	1300	SSF 32060
	8,0						1,5-3,0			SSF 32080
	9,5						3,0-5,0			SSF 32095
	12,0						5,0-6,5			SSF 32120
4,0	6,0	8,0 +0,4/-1,1	1,7	2,3	27	4,1	0,5-1,5	1700	1860	SSF 40060
	8,0						1,5-3,0			SSF 40080
	10,0						3,0-5,0			SSF 40100
	12,0						5,0-6,5			SSF 40120
	15,0						6,5-10,0			SSF 40150
4,8	8,0	9,5 +0,6/-1,2	2,0	2,9	27	4,9	1,0-3,0	2400	2900	SSF 48080
	10,0						3,0-5,0			SSF 48100
	12,0						6,0-7,5			SSF 48120
	12,5						5,0-7,0			SSF 48125
	14,0						7,5-9,0			SSF 48140
	15,0						7,0-9,5			SSF 48150
	16,0						8,0-10,5			SSF 48160
	18,0						9,5-12,5			SSF 48180
21,0	13,0-16,0	SSF 48210								
6,4	15,0	12,8 +0,6/-1,2	2,7	3,8	31	6,5	3,0-6,5	3600	4000	SSF 64150
	16,0						6,5-8,0			SSF 64160
	21,0						8,0-12,5			SSF 64210