


Заклепка открытого типа

Тип **AB**

Стандартный борт

Алюминиевый сплав (AlMg 5,0) / Нержавеющая сталь

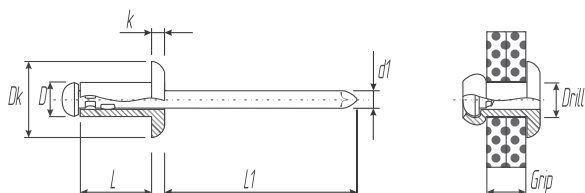

D, мм +0,08/-0,15	L, мм	Dk, мм	k, мм	d1, мм max	L1, мм min	Drill, мм	Grip, мм	H	H	Артикул
3,2	6,0	6,5 +0/-0,7	1,0	1,78	25	3,3	1,5-3,5	890	1150	AB 3206
	8,0						3,5-5,5			AB 3208
	10,0						5,5-7,0			AB 3210
	12,0						7,0-9,0			AB 3212
	14,0						9,0-11,0			AB 3214
	16,0						11,0-13,0			AB 3216
	18,0						13,0-15,0			AB 3218
	20,0						15,0-17,0			AB 3220
4,0	6,0	8,0 +0/-1,0	1,3	2,18	27	4,1	1,5-3,0	1400	2100	AB 4006
	8,0						3,0-5,0			AB 4008
	10,0						5,0-6,5			AB 4010
	12,0						6,5-8,5			AB 4012
	14,0						8,5-10,5			AB 4014
	16,0						10,5-12,5			AB 4016
	18,0						12,5-14,5			AB 4018
	20,0						14,5-16,5			AB 4020
	25,0						16,5-21,5			AB 4025
	30,0						21,5-26,0			AB 4030
35,0	26,0-30,0	AB 4035								
4,8	6,0	9,5 +0/-1,0	1,4	2,7	27	4,9	1,5-2,5	1700	2500	AB 4806
	8,0						2,5-4,0			AB 4808
	10,0						4,0-6,0			AB 4810
	12,0						6,0-8,0			AB 4812
	14,0						8,0-10,0			AB 4814
	16,0						10,0-12,0			AB 4816
	18,0						12,0-14,0			AB 4818
	20,0						14,0-16,0			AB 4820
	25,0						16,0-21,0			AB 4825
	30,0						20,0-25,0			AB 4830
	35,0						25,0-30,0			AB 4835